





STEP Systems

Pumps (Turbine Effluent)

P-TE-10, P-TE-20, P-TE-30, P-TE-50

Features

- Dry-run capability
- Patented Staging System handles sand conditions with ease
- Self-lubricating Nylatron® resists wear from sand
- 7/16" (12mm) positive drive 300 series stainless steel hexagonal shaft
- Carbon/Ceramic mechanical seal
- Ball bearing construction for long life

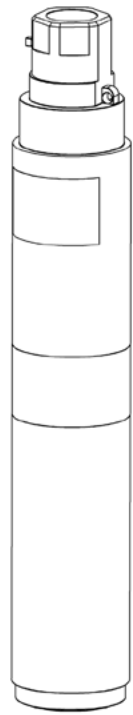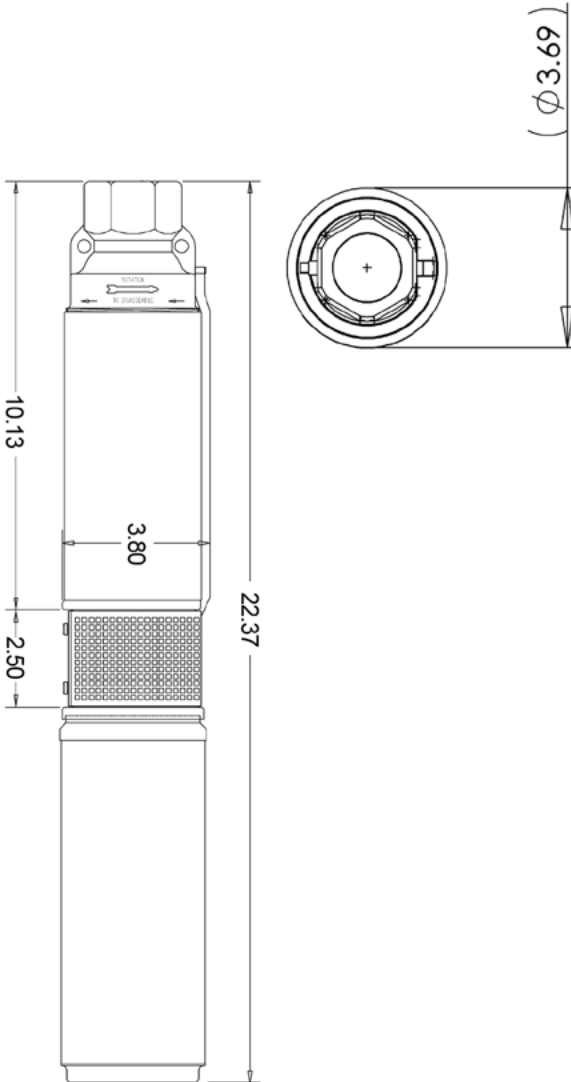

Specifications

Capacities: From 15 - 80 GPM

Heads: To 260 FT

Motor: 1/2 HP; hermetically sealed with automatic thermal overload

Electrical: 115V, 12.0 FLA, 1PH, 60Hz

Operation: Manual model (controls required)

Minimum Diameter: 4" (102mm)

Impeller: Delrin®, closed vane type

Solids handling: 1/8" (3.2mm)


Power Cord: 10' (3M), 300 V SJOW jacketed, 2-wire with ground

Materials of Construction: 300 grade stainless and cast-iron

Discharge: 10, 20, 30 GPM = 1-1/4"; 50 GPM = 2"

Warranty for Defects in Material and Workmanship

- All components - 3 Years

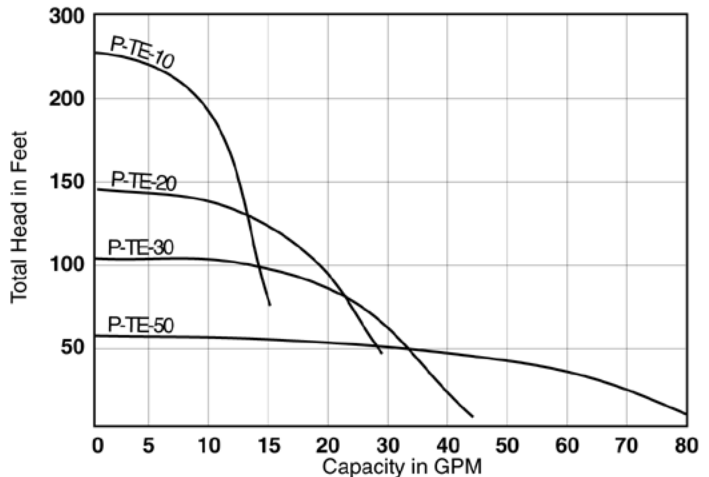

Quanics
Engineering Water Solutions™

P.O. Box 1520, Crestwood, Ky, 40014

Copyright 2006, Quanics Incorporated, All rights reserved
Product(s) covered by one or more U.S. and/or international patents. Other U.S. and international patents may be pending.

1-877-QUANICS (782-6427)

www.quanics.net