





## STEP Systems

Pumps (Turbine Effluent)

P-TE-10 Plus, P-TE-20 Plus, P-TE-30 Plus

### Features

- Bottom intake allows effluent to move across motor without the need for a flow inducer sleeve
- Bottom intake saves storage volume
- High head performance at 10, 20 or 30 GPM
- Dry run capability

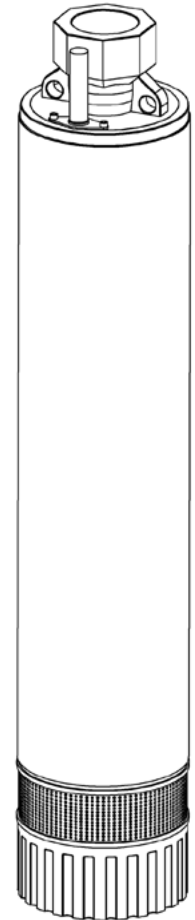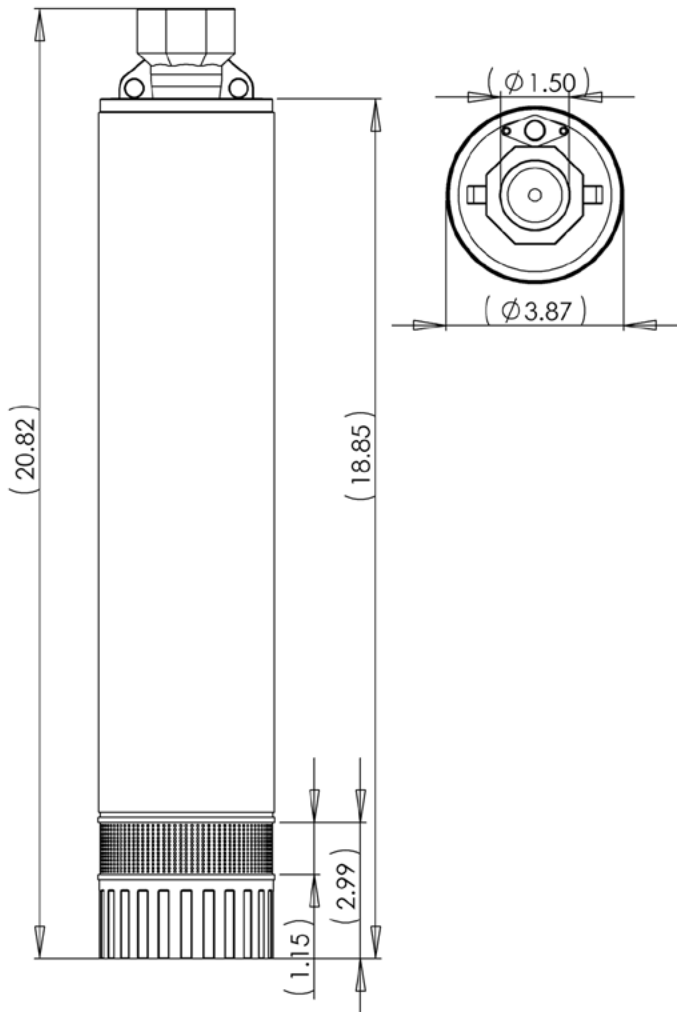

### Specifications

**Capacities:** To 40 GPM

**Heads:** To 250 FT

**Motor:** 1/2 HP, PSC with thermal overload

### Electrical:

P-TE-10 Plus 115V, 11.0 FLA, 1PH, 60Hz

P-TE-20 Plus 115V, 9.5 FLA, 1PH, 60Hz

P-TE-30 Plus 115V, 9.5 FLA, 1PH, 60Hz

**Operation:** Manual model controls required

**Impeller:** Delrin<sup>®</sup>, closed vane type

**Solids handling:** 1/8" (3.2mm)


**Power Cord:** 10' (3M), 300 V SJOW jacketed, 2-wire with ground

**Materials of Construction:** 300 grade stainless steel

**Discharge:** 1-1/4"

### Warranty for Defects in Material and Workmanship

- All components - 3 Years

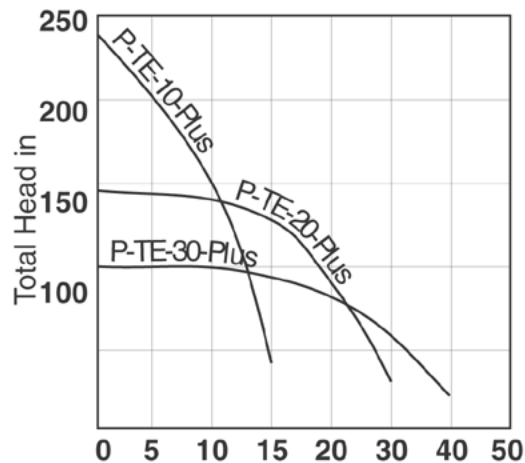

P.O. Box 1520, Crestwood, Ky, 40014

Copyright 2006, Quanics Incorporated, All rights reserved  
Product(s) covered by one or more U.S. and/or International patents. Other U.S. and International patents may be pending.