



STEP Systems

Pressure Distribution (Discharge Assemblies)

PDS-TD-1.25, PDS-TD-2.0, PDS-TD-1.25-D, PDS-TD-2.0-D

Features

- Pump discharge for high head filtered effluent pumps
- Includes all components to bring discharge from pump out of tank
- True union ball valve
- Includes flex tubing for easy installation
- 4" flow inducer sleeve with cap

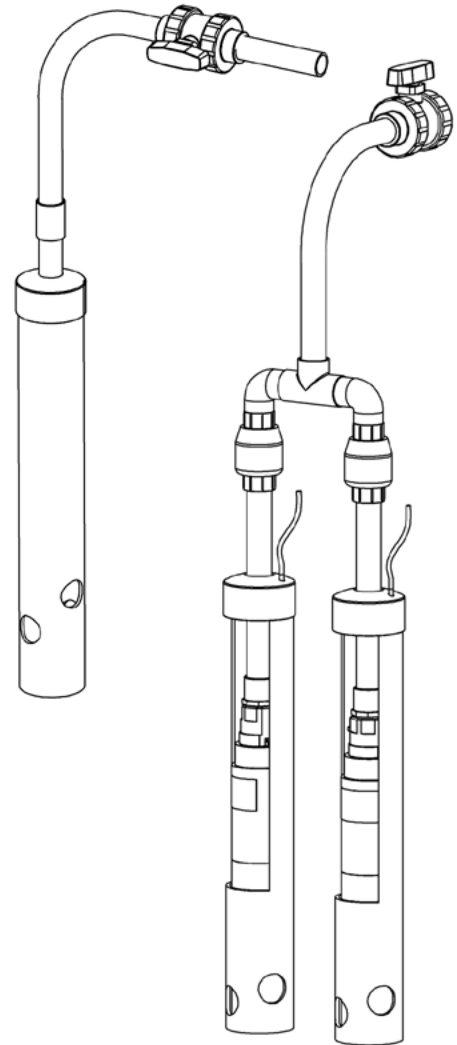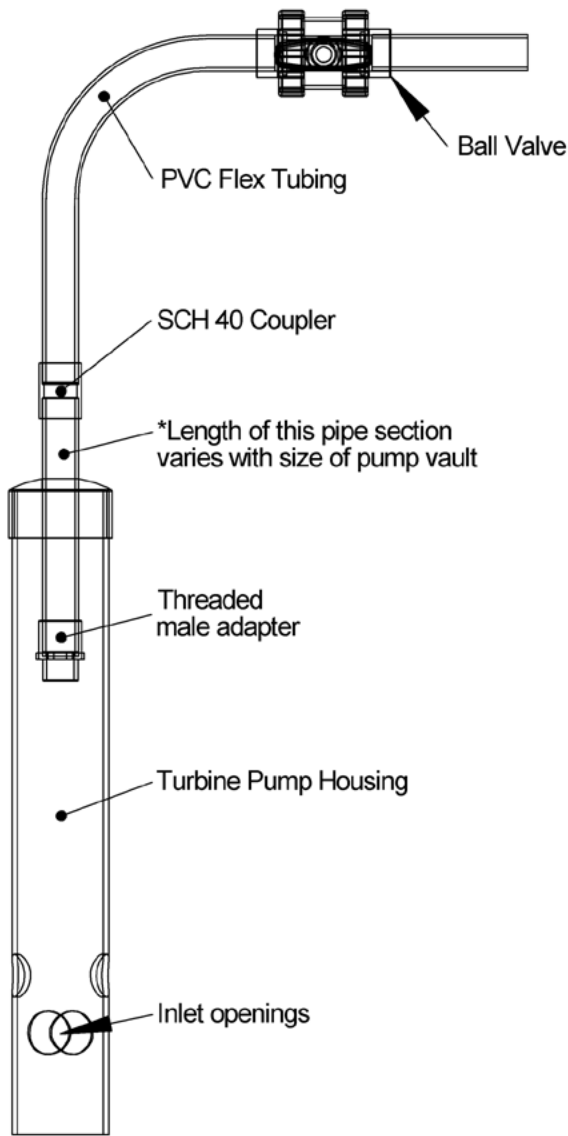

Duplex model, pumps not included

Materials

Pipe

- 1.25" or 2" SCH 40 PVC
- 1.25" or 2" PVC flex tubing
- 4" SCH 40 PVC flow inducer

True Union Ball Valve

- PVC Plastic
- Double block, full port design
- 1.25" or 2" slip/slip hubs

Check Valve

- PVC Plastic swing type (Duplex model only)

Fittings

- SCH 40 PVC threaded slip adapter
- SCH 40 PVC slip/slip adapter

Warranty for Defects in Material and Workmanship

- All components - 2 Years

Quanics
Engineering Water Solutions™

P.O. Box 1520, Crestwood, Ky, 40014

Copyright 2006, Quanics Incorporated, All rights reserved
Product(s) covered by one or more U.S. and/or International patents. Other U.S. and International patents may be pending.