

STEP Systems Alarms & Controls (Control Panels)


AC-CP-D-C-T

Features

- Duplex alternating timed control for 120/208/240 pumps
- Standard configuration includes on/off and high water floats
- Audible and visual alarm
- Separate pump and alarm circuit terminal blocks
- Circuit breakers provides pump disconnect and branch circuit protection



Standard Float Configuration

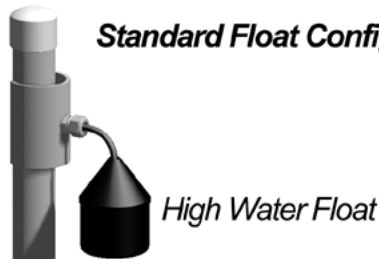

Optional Float Configuration



High Water Float

Timer Override Float

On/Off Float



Specifications

Enclosure

- Measures 14x12x6 inches (35.56x30.48x15.24cm) NEMA 4X (ultraviolet stabilized thermoplastic with removable flanges for outdoor or indoor use)
- Magnetic Motor Contactors control pumps by switching both hot electrical lines
- HOA Switches for manual pump control
- Control/Alarm Fuse
- Float Switch Terminal Block
- Incoming Power Terminal Block
- Programmable Timer with separate variable controls allows for setting the on and off times from .05 seconds to 30 hours
- Pump Circuit Board provides pump control and alternation (U.S. Patent 5,909,352)
- Spare Fuse
- Ground Lugs

Standard Alarm Package

- Red Alarm Beacon provides 360 visual check of alarm condition
- Alarm Horn provides audio warning of alarm conditions (83 to 85 decibel rating)
- Exterior Horn Test/Normal/Silence Switch allows alarm horn to be silenced and testing of horn and light to ensure proper operation of alarm system

Warranty for Defects in Material and Workmanship

- AC-CP-D-C-T - 3 Years

Quanics
Engineering Water Solutions™

P.O. Box 1520, Crestwood, Ky, 40014

Copyright 2006, Quanics Incorporated, All rights reserved
Product(s) covered by one or more U.S. and/or international patents. Other U.S. and international patents may be pending.